

PRO-LINE

APPLICATION CHART 2009

RACING.COM



1:8 BUGGY



2/2/09

Tires

Part #	Description	Available Compounds ▲ XTR ● M2 ■ M3	Price
Standard Size			
9012-00	Road Rage	●	\$24.00
9014-00/01/02	Crime Fighter	▲ ● ■	\$24.00/26.00
9020-01	Knuckles 2.0	●	\$24.00
9021-00	Badlands	▲	\$24.00
9023-02	Inside Job	■	\$26.00
9025-00/01/02	Bow-Tie	▲ ● ■	\$24.00/26.00
9026-01/02	Hole Shot	● ■	\$24.00/26.00
9029-00/01/02	Revolver	▲ ● ■	\$24.00/26.00
V3 (with use of V3 Wheels)			
9027-00/01/02	Bow-Tie V3	▲ ● ■	\$27.00/29.00
9028-00/01/02	Revolver V3	▲ ● ■	\$27.00/29.00

Wheels

Part #	Description	Price
2702-02/04	Velocity V2	\$21.00 (4pk)
2703-02/04	Velocity V3	\$14.50

* Will not fit front

Bodies

Part #	Description	Price
3192-00	Crowd Pleazer 2.0	\$29.00
3208-00	Crowd Pleazer 2.0	\$29.00
3214-00	Crowd Pleazer 2.0	\$29.00
3232-00	Crowd Pleazer 2.0	\$29.00
3260-00	Crowd Pleazer 2.0	\$29.00
3265-00	Crowd Pleazer 2.0	\$29.00
3279-00	Crowd Pleazer 2.0	\$29.00
3282-00	Crowd Pleazer 2.0	\$29.00
3289-00	SHIFT	\$29.00
3295-40	SHIFT	\$29.00
3298-40	SHIFT	\$29.00
1494-00	HardDrive	\$29.00

Accessories

Part #	Description	Price
6023-02/03/04	High Downforce Wing	\$16.50
6118-00	1:8 Low Pro Air Filter Assembly	\$14.50




TRACK CONDITIONS		▲ XTR	● M2	■ M3
Hard Packed / Blue Groove	▲ ● ■			
Hard Packed / Light Dust	▲ ● ■			
Medium Packed / Moist	▲ ● ■			
Medium Packed / Loamy	▲ ● ■			
Loamy	▲ ● ■			
Clay	▲ ● ■			
All-Terrain	▲ ● ■			
Asphalt	▲ ● ■			
Sand	▲ ● ■			

Gluing Instructions

1:8 Tire Prep

- For best tire mounting results, remove any flashing from the tire bead (this is the portion of the tire that will sit in the bead of the rim).
- Clean bead of tire with alcohol for best adhesion.
- Place foam inside tire and mount on wheel
- Wrap a thick rubber band around the tire close to the edge of the bead to be glued to hold tire against wheel.

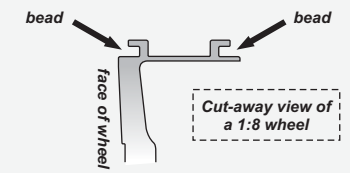

1:8 Tire Gluing Instructions

- Lift up the bead of the tire so that the bead of the wheel is exposed (do not remove the tire bead from wheel).
- Place a drop of glue between tire and wheel ensuring that the glue travels the complete depth of the bead.
- Repeat process around wheel until entire bead has been glued.
- Once tire is glued, lift bead off tire checking for any unglued areas, add additional glue if necessary.



9029-00/01/02 Revolver \$24.00/26.00



2702-02/03/04 Velocity V2 \$15.50

Tire Care & Tips

- To ensure the full life of your foam inserts, do not expose to any type of moisture. Moisture will cause the foam to breakdown and tear in most cases. Vent both wheels and tires to allow dirt to escape. To do this use a leather punch or scissors and cut two diamond shaped holes on opposite ends of the tire.
- When running on loamy or soft conditions, rotate tires front to back for optimum performance.
- When running on hard-packed, blue-groove type conditions, do not rotate tires as a sharp edge on this type of surface tends to cause a skating type sensation.
- For extended rubber freshness, store tires out of sunlight and in a sealable sandwich bag.
- For bearing longevity and optimum track performance, a balanced tire is recommended, just as in full-scale racing. To do this, we recommend using some type of R/C Propeller balancer and modeling clay. Balance once the tire is mounted and glued.



3289-00 SHIFT fits Mugen MBX-6 \$33.00



1496-00 HardDrive fits Losi 8ight \$33.00



6118-00 1:8 Low Pro Air Filter Assembly \$33.00